

TRIK™-M

Portable package with support for Harris Manpack radios

Voyager 8+ sized case that houses
Harris 117G, 158, 160 or 167 radios
plus 5 Voyager modules



KEY FEATURES

- Airline checkable Voyager 8+ case/chassis with 600W UPS
- Support for any of the following Harris radios:
 - AN/PRC 117G
 - AN/PRC 158
 - AN/PRC 160
 - AN/PRC 167
- 5 remaining slots for:
 - Voyager modules supporting route, switch, compute, backhaul
 - Radio brackets to integrate additional handheld radios, amplifiers, MANET or Tactical Data Link
 - MRB to support 117G (in addition to the manpack radio slot)



SECURE



PORTABLE



RUGGED

EMEA
Klas,
4th Floor, One Kilmainham Square,
Inchicore Road, Kilmainham,
Dublin 8, Ireland
DO8 ETIW.
Tel: +353 1 6624270

US
Klas Government
450 Springpark Place,
Suite 1200,
Herndon, VA 20170
Tel: +1 571-375-2500


KLAS

www.klasgroup.com

VOYAGER

TRIK-M™

Specifications

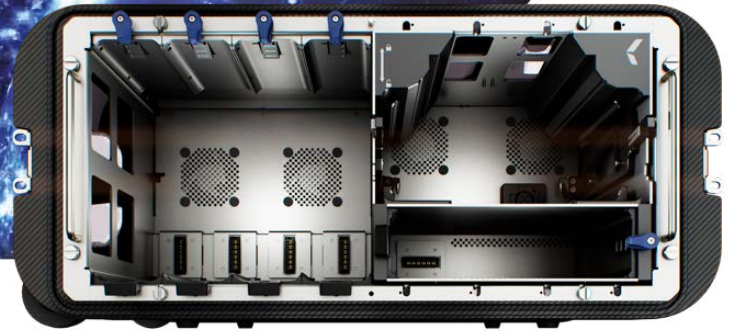

Transit Case Specifications

PHYSICAL SPECIFICATIONS

- 18.8" x 22.5" x 10.1" (478 x 571 x 257mm)
- 23.95kg (52.8lbs) (excluding batteries, radios and modules)

CONSTRUCTION

- Aerospace-grade, carbon fiber monocoque built from single mold structure for maximum strength
- Milled aluminum handles
- O-ring seal around front and rear lids
- Pressure equalization valve

HANDLES & WHEELS

- Retractable extension handle
- Handles on top and bottom of case
- Dual heavy duty plastic wheels

COMPLIANCE

- IP67 case

Chassis Specifications

PHYSICAL SPECIFICATIONS

- 5U 19-inch rack (additional chassis shelf required - sold separately)

TEMPERATURE

- Operating temperature: -10°C to 50°C
- Storage temperature: -10C to 85C

ELECTRICAL INPUT SPECIFICATIONS

- 21-34 VDC (38 Amp maximum)
- 90-264 VAC (< 10 Amp at 100 VAC)
- Max input current of 10 Amp allowed for NEMA Sockets and Voyager 8 Plus

ELECTRICAL OUTPUT SPECIFICATION

- 5 Voyager modules slots with
 - 12 VDC at 120 W
 - 28 VDC at 120 W to power amps
 - 52V for PoE
- 1 x Manpack radio bay
 - 28VDC supply
 - Max draw up to 200W
- 2 x AC outputs available when AC input is present (these outlets are not filtered but are fused to 10 Amp. Please check the powered device for voltage range before using)

UPS

- 3 x BB-2590 batteries (available in high capacity for extended operation or lower capacity to comply with IATA regulations)

CONSTRUCTION

- Aluminum sheet metal
- Milled aluminum latches

MANAGEMENT COMPUTE MODULE

- Intel® Atom™ x5-E3940 quad core processor with 1.6 GHz core frequency and 1.8 GHz burst frequency
- 1 Gb Ethernet and console port interface

COMPLIANCE

Designed to meet:

- MIL-STD-810
- MIL-STD-461
- FCC Part 15 B
- CE
- RoHS
- REACH



L3Harris 117G



L3Harris 158



L3Harris 160



L3Harris 167

EMEA

Klas,
4th Floor, One Kilmainham Square,
Inchicore Road, Kilmainham,
Dublin 8, Ireland
DO8 ETIW.
Tel: +353 1 6624270

US

Klas Government
450 Springpark Place,
Suite 1200,
Herndon, VA 20170
Tel: +1 571-375-2500

KLAS

www.klasgroup.com

VOYAGER