

VOYAGER/158

The Voyager 158 consists of Voyager 8+ chassis and transit case containing the Voyager 158 Sled with support for a Harris AN/PRC-158 Multi-Channel Manpack Radio along with up to two AR Modular RF AR-50 amplifiers and two AR Modular RF AR-RBT Bias-T modules. Power is supplied by the Voyager 8+ chassis which can be connected to an AC or DC power source and has a built-in UPS. The chassis also provides space for two Voyager modules to add RoIP, compute or routing.

KEY FEATURES

- Voyager 8+ UPS/case with sled for dual-channel Harris Falcon IV AN/PRC-158 manpack radio
- Support for 2 x Modular RF AR-50 band-switch RF booster amplifiers
- Support for 2 x Modular RF AR-RBT Bias-T modules
- Space for 2 x Voyager modules
- Voyager 158 systems can be stacked to form a command and communications post
- Chassis can be removed from the transit case and installed in a standard 19" rack for maximum flexibility



Portable



Rugged



Low Power

EMEA:

Klas,
4th Floor, One Kilmainham Square,
Inchicore Road, Kilmainham,
Dublin 8, Ireland
DO8 ETIW.
Tel: +353 1 6624270

US

Klas Government
450 Springpark Place,
Suite 1200,
Herndon, VA 20170
Tel: +1 571-375-2500

www.klasgroup.com

KLAS

VOYAGER/158

Specifications



PHYSICAL SPECIFICATIONS

- 18.8" x 22.5" x 10.1" (478 x 571 x 257mm)
- Case and chassis weight: 46.7 lb / 21.2 kg (excluding radio, amplifiers, bias-T and batteries)
- Chassis weight: 32 lb / 14.5 kg (excluding case, radio, amplifiers, bias-T and batteries)

ELECTRICAL SPECIFICATIONS

- 21-34 VDC input up to 600 W with MIL-STD 1275D filter
- 90-264 VAC input up to 600 W, 50-400 Hz
- Conditioned power provided to Harris 158 radio, AR-50 amplifiers, Bias-T and Voyager modules
- 2 x AC outputs at rear when AC input is present
- Uninterrupted failover between AC, DC and battery
- Space for 2 x BB-2590 batteries (available separately)
- Provides 414 Wh energy of backup

CONSTRUCTION




- Aerospace-grade, carbon fiber monocoque built from single mold structure for maximum strength
- O-ring seal around front and rear lids
- Grab handles on top and bottom of case
- Retractable extension handle
- Lightweight aluminum chassis with integrated PSU

RACKMOUNTABLE CHASSIS

- Voyager 158 chassis may be removed from case for rackmount installations
- 5U 19-inch rack

COMPLIANCE

- Designed to MIL-STD-810G
- CE / FCC
- IP65- rated case

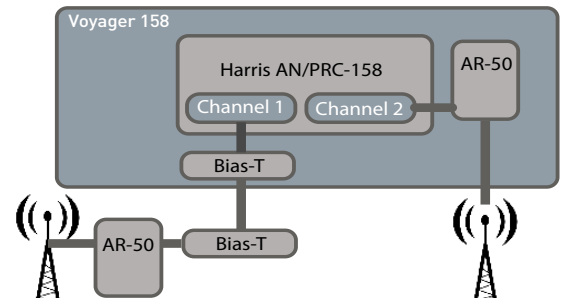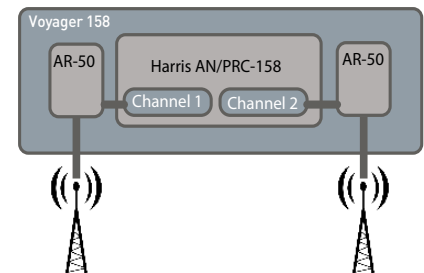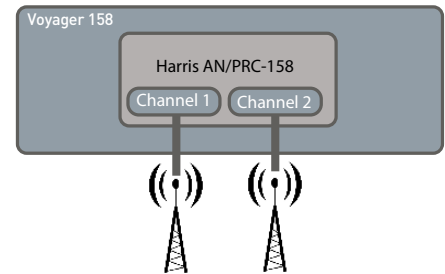

EMEA:

Klas,
4th Floor, One Kilmainham Square,
Inchicore Road, Kilmainham,
Dublin 8, Ireland
D08 ETIW.
Tel: +353 1 6624270

US

Klas Government
450 Springpark Place,
Suite 1200,
Herndon, VA 20170
Tel: +1 571-375-2500

www.klasgroup.com

KLAS